

Model 3-R WINDOW BUBBLE

Rectangular Style Bubble for Masonry or Wood Window Wells


This model is used for rectangular style masonry or wood window wells where the basement window extends above the top of the well. Model 3-R is designed to rest on the well top covering the well opening by a minimum of 2". This unit has a Window Bubble dome attached to redwood sides to give the necessary height to cover your window. The Window Bubble dome is 4" to 5" high, which gives this unit its maximum load strength. If this model is going against a flat vertical wall such as brick, stucco, concrete block or vertical wood siding, the cover should extend at least 2" higher than window height. If you have wood, vinyl or aluminum siding, it is preferable to fit under the siding if possible. If not, we can cut the redwood sides to fill in the space under your siding.

Special Circumstances

We do not advise drilling holes in this unit, either in the flange area or the bubble itself. Do not cut the bubble in any location without first calling our office for recommendations. This cover is excellent for use where irregular stone walls, electric wires or pipes necessitate cutouts for a proper fit. A redwood extension can be added to the back of this unit to scribe against a rough wall or allow for cutouts. If your well has been used to vent a dryer or similar appliance, the redwood sides can be drilled for 2" or 4" screened vents, or you can vent directly through the sides.

Installation is Simple


This model is fastened to the well top with 2 angle brackets. We recommend one on each side near the center of the redwood side. Place the bracket at the desired location and mark the hole on the well top. If the surface is concrete or brick, drill a 1/4" hole (1" deep) with a masonry drill bit. Insert the plastic anchor and screw the bracket to the well top. Tighten until snug. Screw the other side of the bracket to the redwood side. DO NOT OVER TIGHTEN.

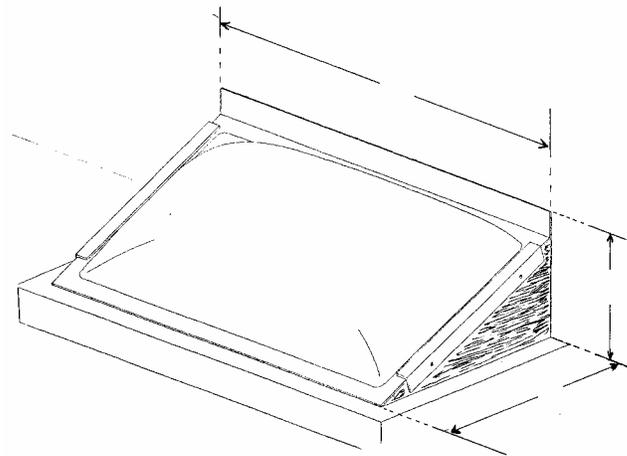

We Use Only High Quality Materials

The Window Bubble is formed from 3/16" PLEXIGLAS® Acrylic. The redwood sides are made of 4/4" (3/4") thick, clear all heart California redwood. We use redwood because of its superior resistance to decay.

RECTANGULAR WELL

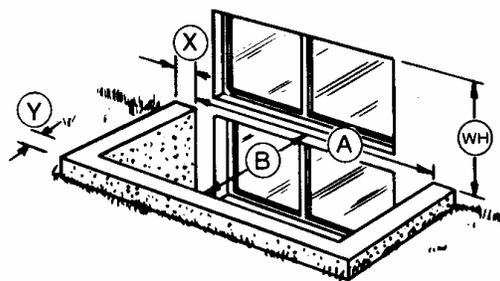

Model 3-R Window Bubble covers rectangular style masonry or wood wells.

Dilworth Manufacturing Company
Creators of the Window Bubble®

PO Box 158, Honey Brook, PA 19344-0158

Toll Free Phone: 888-624-8699

Toll Free Fax: 877-859-7226